



BV LCIE  
CHINA  
Number

N° 2066AS04ABRE34802

## ATTESTATION of conformity with European Directives

*Product:* PV inverter (Grid-tied photovoltaic inverter)  
*Reference* R3-4K-DT, R3-5K-DT, R3-6K-DT, R3-8K-DT, R3-10K-DT, R3-12K-DT, R3-15K-DT  
*Issued to* Renac Power Technology Co., Ltd  
*Address* Building 6, No.2, West Jinzhi Road, High-Tech District, Suzhou City, Jiangsu Province  
*Manufacturer* Renac Power Technology Co., Ltd  
Technical characteristics See Next Page

The submitted sample of the above equipment has been tested for **CE** marking according to following European Directive and following standards:

### Low Voltage Directive 2014/35/EU

Standards	Report number	Report date
EN 62109-1: 2010 EN 62109-2: 2011	ABRE-18SE0601FTSHP-1-R1 ABRE-18SE0601FTSHP-2-R1	2020-04-27

The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified European Directive

This verification does not imply assessment of the production of the product  
The **CE** marking may be affixed if all relevant and effective European Directives with **CE** are applicable

Shanghai (P.R. China), ), April 29<sup>th</sup>, 2020.



This document shall not be reproduced, except in full, without the written approval of BV LCIE China.  
Information given in this document, are related to the tested specimen of the described electrical sample.

LCIE CHINA

必维欧亚电气技术咨询服务(上海)有限公司

Version 3/2016.02.19

Building 4, No. 518, Xin Zhuan Road,  
CaoHejing Songjiang High-Tech Park,  
Shanghai P.R.C (201612)

Tel: +86 21 6195 7000  
Fax: +86 21 6195 7001  
Email: [contact@cn.bureauveritas.com](mailto:contact@cn.bureauveritas.com)



**LCIE**

BV LCIE  
CHINA  
Number

N°2066AS04ABRE34802


Model / Type .....	R3-4K-DT	R3-5K-DT	R3-6K-DT	R3-8K-DT	R3-10K-DT
MPP DC voltage range [V] .....	160-950			250-950	
Max. Input DC voltage [V] .....	1000				
Max. Input DC current [A].....	12,5/12,5				
Output AC voltage [V].....	230/400V, 3/N/PE or 3/PE, 50/60Hz				
Max. Output AC current [A].....	6,4A*3	8A*3	9,6A*3	12,8A*3	16,0A*3
Rated output power [VA].....	4000	5000	6000	8000	10000

Model / Type .....	R3-12K-DT	R3-15K-DT	--	--	--
MPP DC voltage range [V] .....	250-950		--	--	--
Max. Input DC voltage [V] .....	1000		--	--	--
Max. Input DC current [A].....	12,5/12,5	20/12,5	--	--	--
Output AC voltage [V].....	230/400V, 3/N/PE or 3/PE, 50/60Hz		--	--	--
Max. output AC current [A].....	19,2A*3	24,0A*3	--	--	--
Rated output power [VA].....	12000	15000	--	--	--

Shanghai (P.R. China), , April 29<sup>th</sup>, 2020.



Harvey Wang  
Product Line Manager

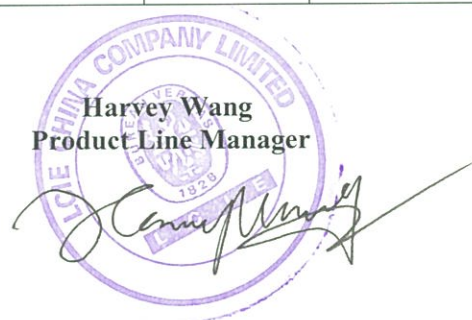

This document shall not be reproduced, except in full, without the written approval of BV LCIE China.  
Information given in this document, are related to the tested specimen of the described electrical sample.

LCIE CHINA

必维欧亚电气技术咨询服务(上海)有限公司

Version 3/2016.02.19

Building 4, No. 518, Xin Zhuan Road,  
CaoHejing Songjiang High-Tech Park,  
Shanghai P.R.C (201612)

Tel: +86 21 6195 7000  
Fax: +86 21 6195 7001  
Email:[contact@cn.bureauveritas.com](mailto:contact@cn.bureauveritas.com)